
| LABEL | MIN. | MAX. | U.M. | DEF. | ALARMS |
|-------|------|------|-----------|------|--|
| A0 | 1 | 15 | °C/°F (4) | 2 | hysteresis (differential, it is relative to A1 and A2, it is important if A1 and/or A2 \neq 0) |
| A1 | -55 | 0 | °C/°F (4) | 0 | lower temperature alarm threshold (it is relative to the working setpoint, $0 = it$ will never be activated) |
| A2 | 0 | 99 | °C/°F (4) | 0 | upper temperature alarm threshold (it is relative to the working setpoint, $0 = it$ will never be activated) |
| A3 | 0 | 15 | h | 0 | temperature alarm exclusion time since you turn the instrument ON (it is important if A1 and/or A2 \neq 0) |

| LABEL | MIN. | MAX. | U.M. | DEF. | serial network (evcobus) |
|-------|------|------|------|------|--------------------------|
| L1 | 1 | 15 | _ | 1 | instrument address |
| L2 | 0 | 7 | _ | 0 | instrument group |


- the unit of measure depends on the parameter /8
- [5] if the parameter r3 has value 0, you have to set the parameter r0 with positive sign; if the parameter r3 has value 1, you have to set the parameter r0 with negative sign.

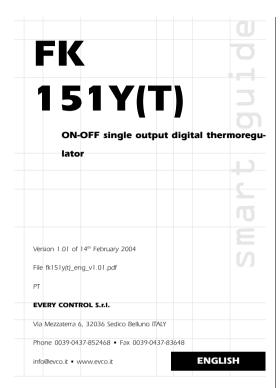

PREPARATIONS


1.1 How to install the instrument

Panel mounting, panel cut out 71 x 29 mm (2.79 x 1.14 in), with click brackets (they are supplied by the builder) or screw brackets (by request).

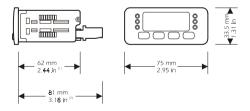

(1) maximum depth with screw terminal blocks


(2) maximum depth with extractable terminal blocks.



installation with click brackets (on the left-hand side, they are supplied by the builder)

and screw brackets (on the right-hand side, by request); if you are using screw brackets, you have to moderate the clamping torque, in order not to damage the box and screw

1.2 Electrical connection

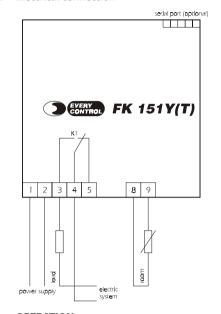

2 **OPERATION**

Preliminary information

During the normal operation the instrument shows the room temperature.

2.2 How to silence the buzzer (optional)

If you have to silence the buzzer:

(**\P**) press

WORKING SETPOINT

3.1 How to set the working setpoint

If you have to modify the working setpoint value:

sat and \wedge or \checkmark

(3) you can set the working setpoint between the limits you have set with the parameters r1 and r2.

CONFIGURATION PARAMETERS

4.1 How to set the configuration parameters

Configuration parameters are arranged on two levels.

If you have to gain access the first level:

press ♠ and ♠ for 4 s : the instrument will show PA

If you have to select a parameter:

♠ or ♠

If you have to modify the value of the parameter:

press

| set and 🔨 | |
|-----------|--|
|-----------|--|

or 🕠

If you have to gain access the second level:

gain access the first level

↑ or **↓**

for selecting PA

press

press

set and ↑ or ↓ for setting "-19" ♠ and ♠

for 4 s : the instrument

will show ႕ 🛚

If you have to quit the procedure:

♠ and ♠

for 4 s or do not operate for about 60 s.

SIGNALS

5.1 Signals

| LED | MEANING |
|-----|---|
| out | Load LED |
| | if it is lighted, the load will be ON |
| | if it flashes, a load delay will be running (look at the parameters C0, C1, |
| | C2 and C4) |

ALARMS

Alarms

| CODE | reasons | REMEDIES | EFFECTS |
|-----------|-------------------------|-------------------------|-------------------------|
| E 2 | there is the corruption | switch off the power | • you can not gain |
| corrupted | of the configuration | supply of the instru- | access the setting |
| memory | data of the memory of | ment: unless the alarm | procedures |
| data | the instrument | disappears, you will | • the load will be |
| | | have to change the in- | forced OFF |
| | | strument | |
| E 0 | • the kind of room | • look at the param- | the load will be forced |
| room | probe you have con- | eter /0 | to the status you have |
| probe | nected is not right | • test the integrity of | set with the param- |
| alarm | • the room probe | the probe | eter C3 |
| | plays up | • test the instrument- | |
| | • the connection in- | probe connection | |
| | strument-room | | |
| | probe is wrong | | |
| | | | |

| | • the room tempera- | • test the temperature | |
|------------|--------------------------|--------------------------|-----------|
| | ture is outside the | close to the probe (it | |
| | limits allowed by the | has to be between | |
| | working range of | the limits allowed by | |
| | the instrument | the working range) | |
| room | the room temperature | test the temperature | no effect |
| tem- | is outside the limit you | close to the probe (look | |
| perature | have set with the pa- | at the parameters A0, | |
| lower or | rameter A1 or A2 | A1 and A2) | |
| upper | | | |
| tempera- | | | |
| ture alarm | | | |

The instrument shows the indications above flashing and the buzzer (optional) utters an intermittent beep.

TECHNICAL DATA

7.1 Technical data

Box: self-extinguishing grey.

Size: 75 x 33.5 x 81 mm (2.95 x 1.31 x 3.18 in) the model with extractable terminal blocks, 75 x 33.5 x 62 mm (2.95 x 1.31 x 2.44 in) the model with screw terminal blocks. Installation: panel mounting, panel cut out 71 x 29 mm (2.79 x 1.14 in), with click brackets (they are supplied by the builder) or screw brackets (by request).

Frontal protection: IP 65.

Connections: extractable terminal blocks with pitch 5 mm (0.19 in) for cables up to 2.5 mm² (0.38 sq in, power supply, input and output) or screw terminal blocks with pitch 5 mm (0.19 in) for cables up to 2.5 mm² (0.38 sq in, power supply, input and output), 5 poles single line male connector with pitch 2.5 mm (0.09 in, serial port,

Ambient temperature: from 0 to 55 °C (32 to 131 °F, 10 ... 90% of relative humidity without condensate).

Power supply: 230 Vac, 50/60 Hz, 1.5 VA (standard model) or 115 Vac, 50/60 Hz, 1.5 VA (by request).

Alarm buzzer: optional.

Measure inputs: 1 (room probe) for PTC or NTC probes.

Working range: from -50 to 99 °C (-58 to 99 °F) for PTC probe, from -40 to 99 °C (-40 to 99 °F) for NTC probe.

Setpoint range: from -55 to 99 °C (-55 to 99 °F).

Resolution: 1 °F with unit of measure in Fahrenheit. 1 °C with unit of measure in

Display: one red LED 2-digit display 13.2 mm (0.51 in) high, output status indicator.

Outputs: one 10 A @ 250 Vac relay (change-over contact).

Serial port: TTL with EVCOBUS communication protocol (optional).

WORKING SETPOINT AND CONFIGURATION PARAMETERS

8.1 Working setpoint

| LABEL | MIN. | MAX. | U.M. | DEF. | WORKING SETPOINT |
|-------|------|------|-----------|------|------------------|
| | r1 | r2 | °C/°F (4) | 0 | working setpoint |

8.2 First level parameters

| LABEL | MIN. | MAX. | U.M. | DEF. | PASSWORD |
|-------|------|------|------|------|----------|
| PA | -55 | 99 | _ | 0 | password |

| LABE | L MIN. | MAX. | U.M. | DEF. | MEASURE INPUTS |
|------|--------|------|-----------|------|--|
| /1 | -55 | 99 | °C/°F (4) | 0 | room probe calibration (you have to set eight points for adjusting one degree) |

| LABEL | MIN. | MAX. | U.M. | DEF. | REGULATOR |
|-------|------|------|-----------|------|---|
| r0 | -15 | 15 | °C/°F (4) | 2 | hysteresis (differential, it is relative to the working setpoint) (5) |

8.3 Second level parameters

| LABEL | MIN. | MAX. | U.M. | DEF. | MEASURE INPUTS |
|-------|------|------|-----------|------|--|
| /0 | 1 | 3 | _ | 1 | kind of probe (1 = PTC, 3 = NTC) |
| /1 | -55 | 99 | °C/°F (4) | 0 | room probe calibration (you have to set eight points for adjusting one degree) |
| /2 | 0 | 6 | _ | 3 | probe reading speed (0 = fast,, 6 = slow) |
| /8 | 0 | 1 | _ | 1 | temperature unit of measure (0 = Fahrenheit degree, 1 = Celsius degree) |

| LABEL | MIN. | MAX. | U.M. | DEF. | REGULATOR |
|-------|------|------|-----------|------|---|
| r0 | -15 | 15 | °C/°F (4) | 2 | hysteresis (differential, it is relative to the working setpoint) (5) |
| r1 | -55 | r2 | °C/°F (4) | -55 | minimum value you can assign to the working setpoint |
| r2 | r1 | 99 | °C/°F (4) | 99 | maximum value you can assign to the working setpoint |
| r3 | 0 | 1 | _ | 0 | cooling or heating action (0 = cooling action) |

| LABEL | MIN. | MAX. | U.M. | DEF. | LOAD PROTECTION |
|-------|------|------|------|------|---|
| C0 | 0 | 15 | min | 0 | minimum delay between you turn the instrument ON and the first load activation |
| C1 | 0 | 15 | min | 0 | minimum delay between two load activation in succession |
| C2 | 0 | 15 | min | 0 | minimum delay between the load gets OFF and the following activation |
| C3 | 0 | 1 | _ | 0 | load status during the room probe alarm (0 = it will be forced OFF, 1 = it will be forced ON) |
| C4 | 0 | 1 | _ | 0 | fixed delay since the load gets ON and OFF (1 = YES, for 3 s) |